# PROVEN PERFORMER

## Commercial Laundry

STGWYAJP303NN22 (Stack Washer/Dryer - gas)
STEWYAJP303NN22 (Stack Washer/Dryer - electric)

## Stack Washer/Dryer Features

- Improved suspension with new out-of-balance logic manages and redistributes unbalanced loads for uninterrupted wash cycles
- Water use as low as 51.78 litres per cycle to reduce operating costs
- Extended Tumble helps eliminate wrinkling by tumbling for two minutes at 20 minute intervals if the dryer door isn't opened
- Just like their stand-alone counterparts, Speed Queen stacks are 100 percent front serviceable to limit downtime for easy service access

STACKABLE UNIT

STANDARD STAINLESS STEEL WASHING DRUM

LARGE DOOR OPENING

LOW WATER CONSUMPTION

LOW ENERGY CONSUMPTION

COMPACT DESIGN

STGWYAJP303NN22
STEWYAJP303NN22

| | | STGWYAJP303NN22 (Gas) / STEWYAJP303NN22 (El.) | |
|---|---|---|---|
| **GENERAL DETAILS** | | | |
| Type | | Stack Washer | Stack Dryer |
| Control | | Electronic | Electronic |
| Control location | | Front | Front |
| Actuation | | Prep for Card | Prep for Card |
| **DRUM** | | | |
| Capacity | [kg] | 10.5 | 10.5 |
| Cylinder volume | [l] | 96.8 | 198 |
| **DRUM SPEED** | | | |
| G-Force | | 440 | n/a |
| Spin speed | RPM | 1200 | n/a |
| **MOTOR** | | | |
| Motor power | [kW] | 0.9 | 0.25 |
| **CABINET** | | | |
| Cylinder finish | | Stainless | Stainless |
| Colour | | Stainless | Stainless |
| Door type (solid/window) | | Solid | Solid |
| **HEATING** | | | |
| Heat source | | Boiler Fed | Gas /Electric |
| Heating power | | n/a | 25000 BTU (G) / 4800 W (E) |
| **CONNECTION** | | | |
| Gas inlet connection | [mm] | n/a | 9.5 (G) / n/a (E) |
| Exhaust outlet diameter | [mm] | n/a | 102 |
| Exhaust airflow | [l/sec] | n/a | 105 |
| Water inlet | [“] | 3/4 | n/a |
| Water pressure | [Bar] | 1.4-8.3 | n/a |
| Pump Drain | [mm] | 47 | n/a |
| **OPERATION** | | | |
| Cycles | | 6 | 5 |
| Water temperatures | | 3 | n/a |
| Water consumption per cycle litres* | | 51.78 | n/a |
| Cycle indicator lights | | Yes | |
| **POWER** | | | |
| Electrical requirements | [V/Hz/Phase] | 220-240/50/1 | |
| **TRANSPORT DATA** | | | |
| Net weight | [kg] | 175 | |
| Shipping weight | [kg] | 189 | |
| Dimensions H×W×D | [mm] | 1986×683×704 | |
| Packing dimensions H×W×D | [mm] | 2032×864x762 | |
| Volume | [$m^3$] | 1.34 | |

* Based on DOE test procedure

# Dimensions

## Stack Washer/Dryer – gas

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STGWYAJP303NN22<br>STEWYAJP303NN22 | 1678* | 1447* | 597 | 213 | 610 | 203 | 391 | 59 | 938* | 368* | 1140* | 813* | 683 | 1184* | 1986* | 52 | 704 | 38 |

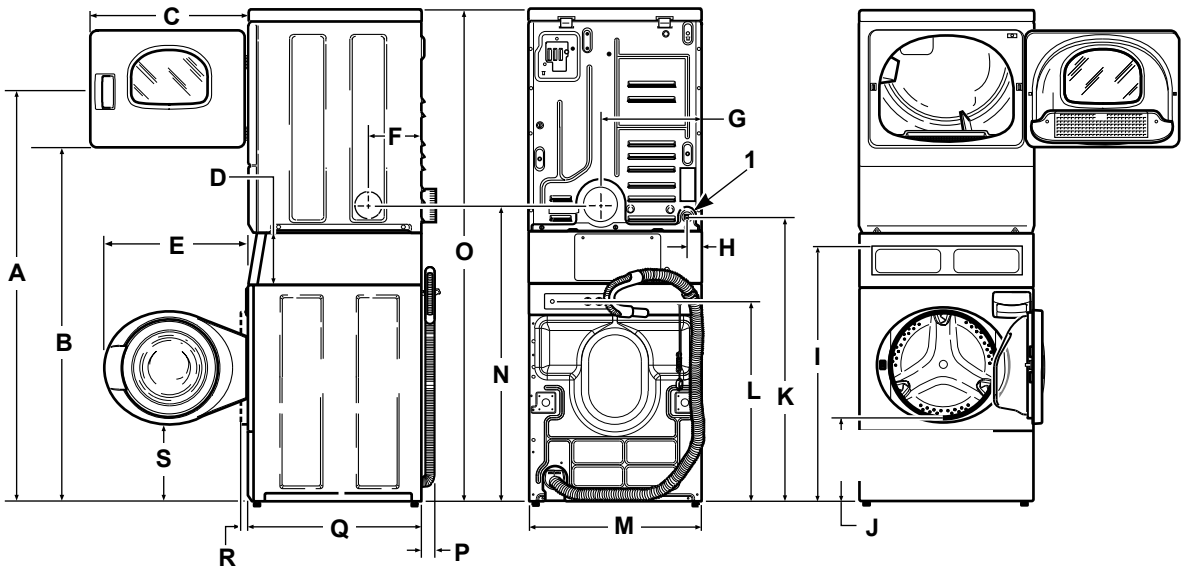


All measurements are in mm. *With levelling legs turned into base.
NOTE: Exhaust openings are 102 mm metal ducting.

Speed Queen by Alliance Laundry Systems
www.speedqueencommercial.com

Speed Queen®